


ORANGE TERROR BASS 500/1000



ENGLISH

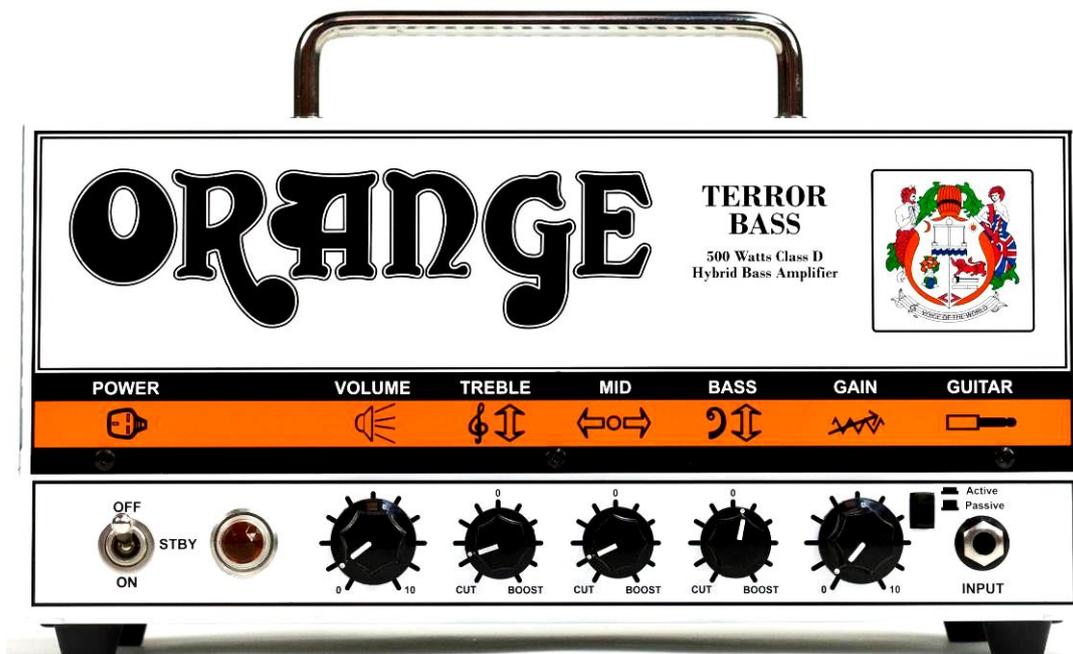

OWNER'S MANUAL

ORANGE TERROR BASS 500/1000

THANK YOU!

Thank you for choosing Orange. You are now a member of the 'Legendary British Guitar Amplifier' owners club!

Since 1968 when the company was founded, Orange has been a pioneering force in the guitar amplification industry. Today, with a team of the world's finest amplifier engineers, Orange continues to push back the boundaries of conventional tube amplifier design.

Our commitment to craftsmanship and quality control has allowed our amplifiers to stand the test of time, giving their owners as much pleasure now, as the day they were bought. To maintain this level of excellence, each Orange amplifier is put through many rigorous test procedures before leaving the factory.

The warmth, tonal quality and rich harmonics generated by a valve amplifier cannot be reproduced by 'artificial' means. Many guitarists have reached the same conclusion: neither the transistor nor microchip is a suitable alternative to valve technology.

This booklet contains valuable technical and safety information. Please take the time to read this manual as the information may enhance the sound and performance of your amplifier. We are confident that you will be delighted with your new purchase and that it will provide you with many years of enjoyment.



ENGLISH

CONTENTS

CONTACT DETAILS.....	4
IMPORTANT SAFETY INFORMATION.....	5
USING YOUR AMPLIFIER	9
FRONT PANEL FEATURES	10
REAR PANEL FEATURES.....	11
FREE EXTENDED WARRANTY OFFER	13

The contents of this manual may be subject to change without notice. The latest version is available for download on the official Orange Amplification website:

<http://www.orangeamps.com/support/downloads/>



ENGLISH

CONTACT DETAILS

Global Headquarters

Orange Amplification
OMEC House
108 Ripon Way
Borehamwood
Hertfordshire
WD6 2JA
ENGLAND

Tel: +44 20 8905 2828

Fax: +44 20 8905 2868

info@omec.com

Orange USA

2065 Peachtree Industrial Ct.
Suite 208
Atlanta, GA 30341
USA

Tel: 1-404-303-8196

Fax: 1-404-303-7176

info@orangeusa.com



ENGLISH

IMPORTANT SAFETY INFORMATION



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of un-insulated 'dangerous voltage' within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons. Terminals labelled as "Speaker Outputs" must be connected to a speaker cabinet of the designated load rating using an un-shielded two conductor cable for speaker use at all times during operation.



The exclamation point within an equilateral triangle and "WARNING" are intended to alert the user to the presence of important operating instructions. Failure to heed the instructions will result in severe injury or death.

- Read these instructions.
 - Keep these instructions.
 - Heed all warnings.
 - Follow all instructions.
- Do not use this apparatus near water.



ORANGE TERROR BASS 500/1000

- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades, one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Servicing: Do not attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards.
- Refer all servicing to qualified service personnel.
- Damage Requiring Service: Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions: (a) When the power-supply cord or plug is damaged; (b) If liquid has been spilled, or objects have fallen into the product; (c) If the product has been exposed to rain or water; (d) If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive work by a



ORANGE TERROR BASS 500/1000

qualified technician to restore the product to its normal operation; (e) if the product has been dropped or damaged in any way; (f) when the product exhibits a distinct change in performance - this indicates a need for service.

- Replacement Parts: When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorised substitutions may result in fire, electric shock, or other hazards.
- The voltage selector switch and mains fuse are factory set for the region in which your amplifier is intended to be sold. Do not tamper with this switch without express permission from Orange Music Electronic Company Ltd.



- Connect the supplied mains cord to the AC Mains Input on the amplifier to your AC mains wall outlet. This Class I electrical equipment must be earthed. The correct mains fuse value for your region are displayed on the unit, close to the AC Mains Input. Replace only with the same type and value. If the mains fuse repeatedly blows, contact your Orange dealer.



This device complies with the Canadian Interference Regulations CAN ICES-3(A)/NMB-3(A)



ENGLISH

ORANGE TERROR BASS 500/1000

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.*
- 2) This device must accept any interference received, that may cause undesired operation.*

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Note: Modifications not expressly approved by Orange Music Electronic Co. Ltd. May void the user's authority to use the equipment



ENGLISH

USING YOUR AMPLIFIER

IMPORTANT!

For countries or regions with a mains voltage of 115V or 120V, please switch the small mains selector to 115V or 120V and replace the fuse in the black pull out fuse tray, below the mains inlet, with the 120V version supplied.

For countries or regions with a mains voltage of 230V, please switch the small mains selector to 230V and replace the fuse in the black pull out fuse tray, below the mains inlet, with the 230V version supplied.

Mains Fuse:

Please contact a qualified service technician if this fuse fails!

TB500

- 230V = T6.3A
- 115/120V = T8A

TB1000

- 230V = T8A
- 115/120V = T10A

Make sure the correct speaker load and power handling is connected at all times (see Rear Panel Features)!



FRONT PANEL FEATURES

INPUT (PASSIVE/ACTIVE BUTTON)

- Set to passive when a passive bass guitar is plugged into the input.
- Set to active when an active bass guitar is plugged into the input.

GAIN CONTROL

The gain control adjusts the input gain of the amplifier.

BASS CONTROL

The bass control adjusts the bass response of the amplifier.

MIDDLE CONTROL

The middle control adjusts the mid-range response of the amplifier.

TREBLE CONTROL

The treble control adjusts the treble response of the amplifier.

VOLUME CONTROL

Adjusts the overall output volume of the amplifier

OFF/STBY/ON Toggle Switch

Make sure that the OFF/STBY/ON switch is in the STBY (middle) position for two minutes before switching the power switch to the ON position. This will warm up the pre-amp valves ready for use and help extend their life.



REAR PANEL FEATURES

IMPEDANCE SELECTOR SWITCH & SPEAKER OUTPUTS

Connect the amplifier to a speaker cabinet of the correct impedance:

- Make sure the impedance selector switch is switched to 8 Ohms when using an 8 Ohm bass speaker cabinet
- Make sure the impedance selector switch is switched to 4 Ohms when using either one 4 Ohm bass speaker cabinet or two 8 Ohm cabinets.

IMPORTANT! The Terror Bass Series produces maximum output power into both 4 and 8 Ohm loads. For this reason, it is important a speaker cabinet(s) of suitable power handling is connected to the amp. Failure to do so may cause damage to both the amp and cabinet(s).

Orange recommends either a single cabinet with a power handling rating equal to the amplifier's rated output power (or greater); or two cabinets each with a power handling rating of at least half of the amplifier's rated output power (or greater).

Terror Bass 1000 = 1000 Watts RMS

Terror Bass 500 = 500 Watts RMS

DI OUTPUT

The DI output is set at professional line level for a padded mixing desk to a PA. An external DI box should still be taken from the actual bass guitar itself in most live situations so that a signal can still be present in case of amplifier failure). **IMPORTANT:** A speaker cabinet of suitable impedance and power handling must be connected to the amplifier's speaker outputs even when the DI Output is in use.



ORANGE TERROR BASS 500/1000

GROUND LIFT BUTTON

Engage this button if ground hum becomes a problem when hooked up to external equipment.

EFFECTS LOOP SEND AND RETURN JACK SOCKETS

The effects loop, send and return jack sockets are intended for use with outboard rack equipment. Most pedals will be better suited placed before the input of the amplifier.



ENGLISH

VALVES AND FUSES CAN FAIL AT ANY TIME!

PRE-AMP VALVES: Both the TB500 and TB1000 contain 2 x 12AX7 (ECC83). For more information on maintenance and for accessories and spares, please visit:

www.orangeamps.com

FREE EXTENDED WARRANTY OFFER

Orange amplifiers are under warranty for one year subject to consumer protection laws in the country of purchase and distributor's terms and conditions, an additional year can be added by registering.

Valves and speakers supplied with an Orange amp or purchased separately at our online store are covered for 90 days from the date of purchase.

The warranty status of any Orange product is subject to its being used for its intended purpose in suitable conditions. As the manufacturer we reserve the right to refuse to warranty any Orange product which has been misused in any way whatsoever.

REGISTER RIGHT NOW AT www.orangeamps.com

